Quality Timber **Decking**



Timber Importers & Sawmillers since 1913

MHSouthern.co.uk



Specifications

Our Redwood decking is machined from high quality FSC or PEFC Scandinavian Redwood. Machined with a dual profile of grooved/ reeded, it offers a perfect alternative to a paved garden patio area.



FSC/PEFC kiln dried Scandinavian Redwood (Tanatone Brown Pressure Treated)

FSC/PEFC kiln dried Softwood C16 graded Joists (Tanatone Brown Pressure Treated)

- 32 x 145mm x 3.6/4.2/4.8m Joinery grade Dual Decking
- 41 x 41 x 895mm Spindles (stop chamfered or turned) • 44 x 66mm Grooved Handrail

Scandinavian Redwood

- 32 x 66mm Grooved Baserail 8 x 41mm PSE Infill
- 82 x 82 x 1250mm Newel Posts (chamfered or turned)



- 47 x 100mm x 3.6/4.2/4.8m
- 47 x 150mm x 3.6/4.2/4.8m



Fused Bamboo Decking

Suitable for both small and large projects, CTECH® and XTR® Bamboo is a sustainable alternative to tropical hardwoods and composite products.

The bamboo is harvested from the forests of Asia after approximately four to six years of growth. A programme of replanting takes place to ensure a continuous supply.


The bamboo is then taken to the mills where it goes through a vigorous selection process. It is then infused with patented ceramic technology to create a high quality long lasting exterior decking product.

Benefits of Bamboo:

- 100% FSC certified
- Environmentally Friendly
- Mould Resistance
- Fire Resistance

We offer the following specifications (including fixing clips):

- 18 x 137 XTR[®] (Espresso) Decking G1/G2
- 20 x 137 CTECH[®] (Cognac) Decking G1/G2

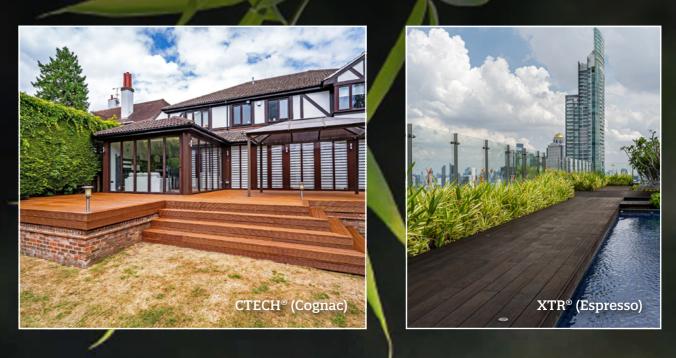

*CTECH and XTR are registered trademarks of Dasso.

GATESHEAD 0191 489 8231

Green Lane Sawmills, Felling, Gateshead NE10 0JS

BERWICK UPON TWEED 01289 307401

Unit BT71 Tweedside Trading Estate, Berwick upon Tweed TD15 2UY


Email sales@MHSouthern.co.uk in 🕅 🔘





CTECH[®]

 Termite Resistance Class 1 Durability 30-50 year Life Expectancy Stable & Precise



XTR[®]



Visit our website MHSouthern.co.uk

Timber Importers & Sawmillers since 1913

Anti-Slip Inserts - 15 Year Warranty Decking - 15 Year Expected Life

Ex Stock Range

FSC/PEFC kiln dried Scandinavian Redwood Anti-Slip Decking (Tanalised Green Pressure Treated) fin 32 x 144mm x 3.6/4.8m Decking

- Joinery Grade Redwood
- PTV 71 Slip Resistant
- Commercial and Domestic use

Our Anti-Slip Decking crafted from FSC / PEFC certified Scandinavian Redwood offering a harmonious blend of sustainability and durability. Its joinery grade construction ensures a proper & suitable Anti-Slip decking solution ideal for both commercial and domestic applications. With a PTV71 slip resistance rating, safety is paramount, providing peace of mind in high-traffic areas. This decking not only promises longevity being Tanalised Green Pressure Treated but also minimises maintenance costs over time. Whether enhancing outdoor spaces or creating safe walkways, this anti-slip decking serves as a reliable solution, offering both aesthetic appeal and practicality in equal measure.

CTECH is a registered trademark of Dasso.

Version 1.8

GATESHEAD 0191 489 8231

Green Lane Sawmills, Felling, Gateshead NE10 0JS

BERWICK UPON TWEED 01289 307401

Unit BT71 Tweedside Trading Estate, Berwick upon Tweed TD15 2UY

Anti-Slip Decking

Our anti-slip decking will help you enhance your design with important safety features. Speak to our experts today to hear about the benefits of our fantastic ex stock offer.



