


WoodLux Structural Collection

Technical Data - Engineered Oak (Brushed & UV Oiled)

Board Construction:

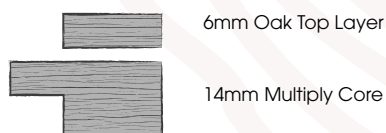

Fixed Length Boards

1900mm

191mm



Product Specification:

Board Depth:	20mm
Board Width:	191mm
Board Length:	1900mm
Pack Size:	1.8145m ²
Pack Weight:	22kg
Packs Per Pallet:	45

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three Layer Flooring Board
Reaction to Fire:	Dfl-s1
Minimum Density:	650 kg/m ³
Minimum Thickness:	20mm
Formaldehyde:	E-1
Thermal Conductivity:	0.12 W/Mk
Biological Stability:	Class 1

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Oiled
Bevel Detail:	4V
Density of Finish:	NPD
Fix System:	T&G
Grade:	Nature
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

Additional Information:

Residential Warranty:	25 Years
Commercial Warranty:	5 Years
Oak Origin:	European
Manufactured In:	P.R.C
Installation Type:	☒ Floating ☒ Glue ☒ Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:

